

Name

Intraweb

Designer

Suzanne Tick

Style No.

2002

Collection

Organized Complexity

Use

Upholstery
 Wrapped Wall
 Panel
 Screens

Content


100% Recycled
 Biodegradable* Polyester

Abrasion

Wyzenbeek
 100,000 double rubs

Environmental


Recycled Content
 Chemical Finish Free
 Biodegradable*
 Fluorine Free Stain
 Repellent
 Facts 3rd-party certified to
 NSF/ANSI 336 Gold

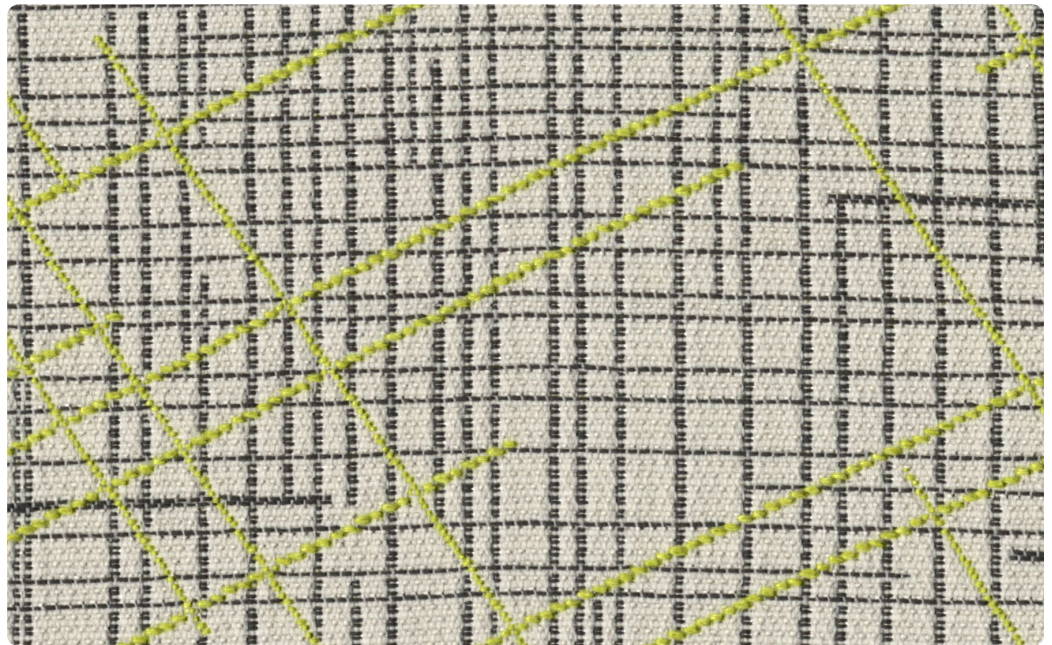

Coaxial 2002-05



Coaxial 2002-05



Origin 2002-06




Polytope 2002-03




Superposition 2002-04




Slope 2007-07




Raster 2002-01



Dual Trace 2002-02



Polarity 2002-08



Isosurface 2002-09

LUUM

Name **Intraweb**

Style No. **2002**

Designer Suzanne Tick

Specification
Use: Upholstery/Wrapped Wall/Panel/Screens
Content: 100% Recycled Biodegradable* Polyester (Post Consumer)
Weight: 17.8 oz per linear yard
Width: 54"
Pattern Repeat: 12.5" Horizontal, 22.6" Vertical
Directional: Yes

Finish Fluorine Free Stain Repellent

Performance
Abrasion: ASTM D4157 Wyzenbeek 100,000 double rubs
Breaking Strength: ASTM D5034 Warp 276 lbf, Fill 369 lbf
Seam Slippage: ASTM D4034 Warp 77 lbf, Fill 92 lbf
Colorfastness to Light: AATCC 16, Grade 4-5 at 40 Hours
Colorfastness to Crocking: AATCC 8, Wet Class 5, Dry Class 4-5
Pilling: ASTM D3511 (Brush Pill), Class 4


Acoustical Rating Fabric Transparency 0.90, NRC 0.70 tested to ISO 10534-2 standards

Flame Retardancy Cal TB 117-2013
ASTM E84 Unadhered Class A or 1

Maintenance WS, Clean with either a water-based or solvent-based cleaning agent

Environmental
Recycled Content
Chemical Finish Free
Biodegradable*
Fluorine Free Stain Repellent
Facts 3rd-party certified to NSF/ANSI 336 Gold

Origin Canada



Graphic shows one full repeat.

Canada
877.705.LUUM
luumtextiles.ca

USA
877.705.LUUM
luumtextiles.com

International
919.464.2922
luumtextiles.com

cdn/us/int/09-23

© Luum™ 2023, all rights reserved.

*™ Trademarks used under license by Luum™, Intraweb™

*Certification Marks owned by the Association for Contract Textiles, Inc.

**Rate and extent of biodegradation into elements found in nature is 91% after 1,278 days under ASTM D5511 (Anaerobic Biodegradation of Plastic Materials Under High Solids Anaerobic Digestion Conditions.) The test was done with the same component (PET) polyester and biocatalyst additive. No evidence of further degradation.

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

U3-A3-P4-SC-305-2002