



Crossgrain by Luum

From fiber to finish, Crossgrain's dense, textural character was specially developed for multipurpose use on upholstery, acoustical panels, wrapped walls and screens. Using traditional weaving techniques and modern dye chemistry, Crossgrain's recycled and custom-texturized fibers were spun to achieve an irregular, fine grained surface effect reminiscent of raw wood. Crossgrain provides a wash of saturated, variegated color in pastels, deep jewel tones and classic neutrals.

Name

Crossgrain

Designer

Suzanne Tick

Style No.

4089

Use

Upholstery
 Wrapped Wall
 Panel
 Screens

Content


61% Polyester +
 39% Recycled Polyester

Abrasion

Wyzenbeek
 100,000 double rubs

Environmental

Heavy Metal Free
 PFOA/PFOS Free
 Stain Repellent
 Recycled Content

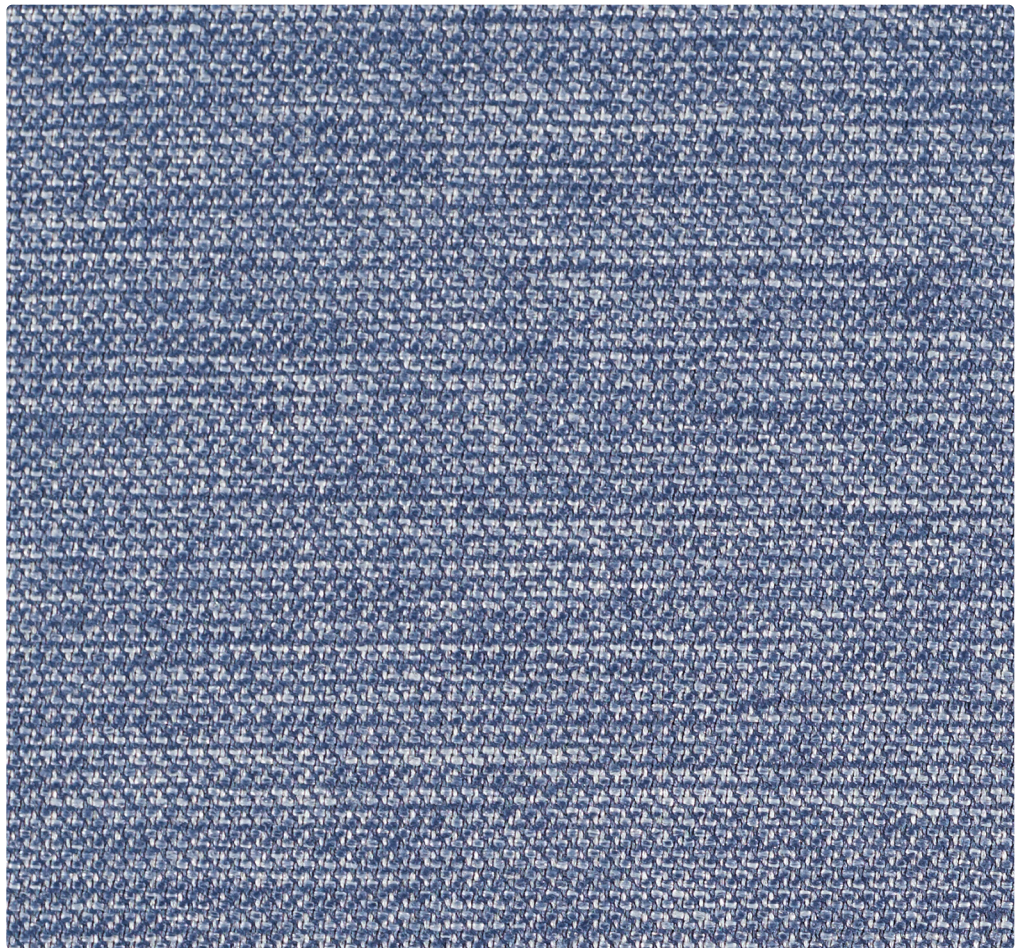


Xylem 4089-05




Underbrush 4089-01




Xylem 4089-05




Cove 4089-04



Dado 4089-02




Blackwood 4089-03




Amaranth 4089-07




Burl 4089-12




Tuliptree 4089-09




Red Oak 4089-08




Tenon 4089-06




Ginkgo 4089-11




Iroko 4089-10



Driftwood 4089-15



Springwood 4089-14



Cypress 4089-13

Name **Crossgrain**

Style No. **4089**

Designer Suzanne Tick

Specification
Use: Upholstery/Wrapped Wall/Panel/Screens
Content: 61% Polyester + 39% Recycled Polyester (Postconsumer)
Weight: 21 ± 0.5 oz per linear yard
Width: 54"
Pattern Repeat: None
Directional: Yes

Finish
Stain Repellent
Latex Backing

Performance
Abrasion: ASTM D4157 Wyzenbeek 100,000 double rubs
Breaking Strength: ASTM D5034 Warp 290 lbf, Fill 357 lbf
Seam Slippage: ASTM D4034 Warp 143 lbf, Fill 105 lbf
Colorfastness to Light: AATCC 16, Grade 4-5 at 40 Hours
Colorfastness to Crocking: AATCC 8, Wet Class 4, Dry Class 4
Pilling: ASTM D3511 (Brush Pill), Class 4

Acoustical Rating
Fabric Transparency 0.65, NRC 0.55 tested to ISO 10534-2 standards

Flame Retardancy
Cal TB 117-2013, UFAC Class 1, NFPA 260
ASTM E84 Unadhered Class A

Maintenance
WS, Clean with either a water-based or solvent-based cleaning agent.

Environmental
Heavy Metal Free
PFOA/PFOS Free Stain Repellent
Recycled Content

Origin
Mexico

Dye lots may vary slightly from samples shown.



Canada
877.705.LUUM
luumtextiles.ca

USA
877.705.LUUM
luumtextiles.com

International
919.464.2922
luumtextiles.com

cdn/us/int/02/21

© Luum™ 2021, all rights reserved.

®,™ Trademarks used under license by Luum™, Crossgrain™

*Certification Marks owned by the Association for Contract Textiles, Inc.

U2-P3-A2-SC-305-4089