## LUUM

Geoglyph

**Name** Geoglyph

**Designer** Suzanne Tick

**Style No.** 4107

**Collection** Earthly Artifacts

**Use** Indoor/Outdoor Upholstery

**Content** 98% Polypropylene + 2% Polyester

Abrasion Wyzenbeek 45,000 double rubs

Special Characteristics Bleach Cleanable


## Environmental

Chemical Finish Free Heavy Metal Free Oeko-Tex 100 Certified REACH Regulation Compliant



## Geoglyph by Luum


Fragmented and textural, emerging and fading, Geoglyph's large-scale grid pattern mirrors the impressions we leave on the Earth, progressing from the ordered to the eroded. A nod to the graphic patterns of geoglyphs—works of art created by arranging objects within a landscape—this upholstery textile utilizes high-UV boucle and blended yarns, making it bleach-cleanable and suitable for indoor/outdoor use alongside its coordinate, Pebble Melange.

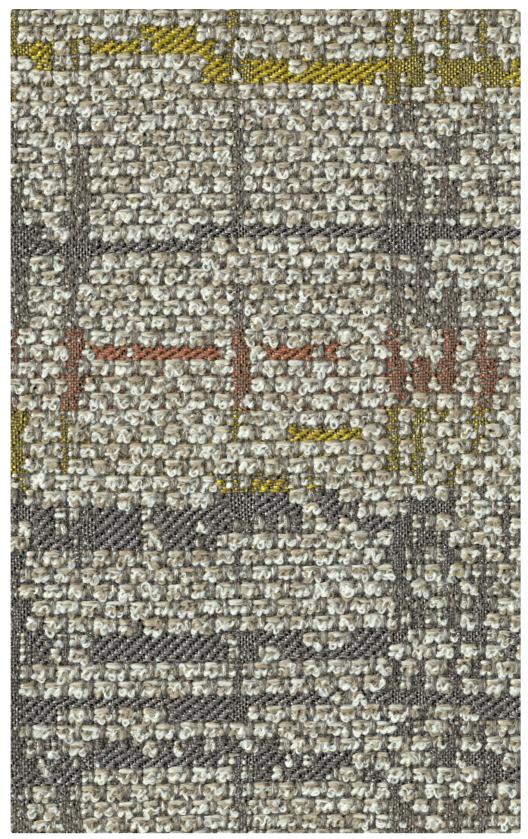

Drifting Sediment 4107-01

South Fall 23 3.4 201 12 20 00 E 134 DER 20 PE. Pri 14 20 26 1 34 Star 21 Carl the De 34 1 2 12 13 000 LA 65 612 00 165 84 9 600 10 60.112 12 62 8 ( 150 02 31 14 25 04 64 N. 63 Sec. 23 20 6 1 27 12 5 62 10 627 Sec. 1 13.23 ASP C. 501 44 374 10 3.1 a spin an · · · · · 12, 21 83 60 18 60 M 190 191 10 100 · 20 50 1 30 1 66 56 600 50 P. P. P. S. S. C. F. 1-28 5.00 40 273 Sec. 10 20 12 10 3.0 No. Th 30 100 1300 9 100 Section States - Asy 3. 23 86 82 4


Polar Lights 4107-02

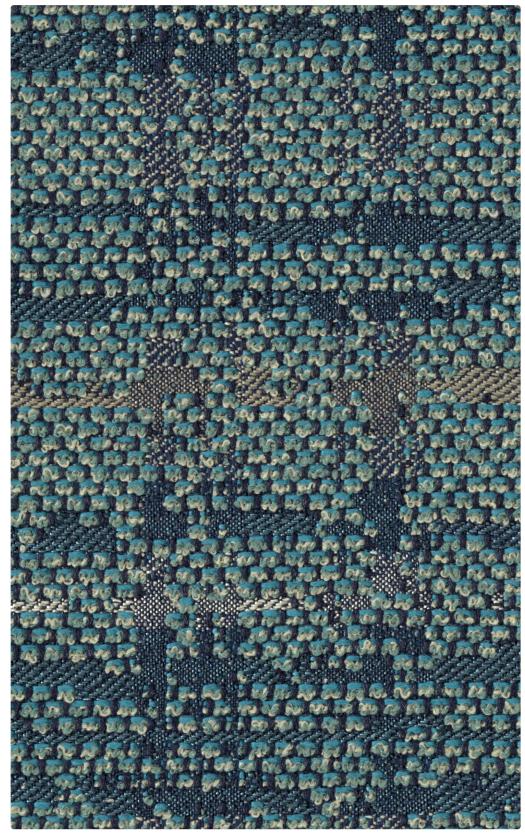


Moonlit Mountain 4107-03

6 27 NIL SG 22 BY 36 00 42 600 1996 640 73 au 50 1.0 26 62 93 she and a SE D. 200 1 (2)1992 Ø Ø - 888. 16 25 Pur 1.20 100 DE and 100 100 100 F 18 21 27-7 400Ľ. 12 1 191 669 Bill Bar 2 3 1

Organic Compound 4107-04

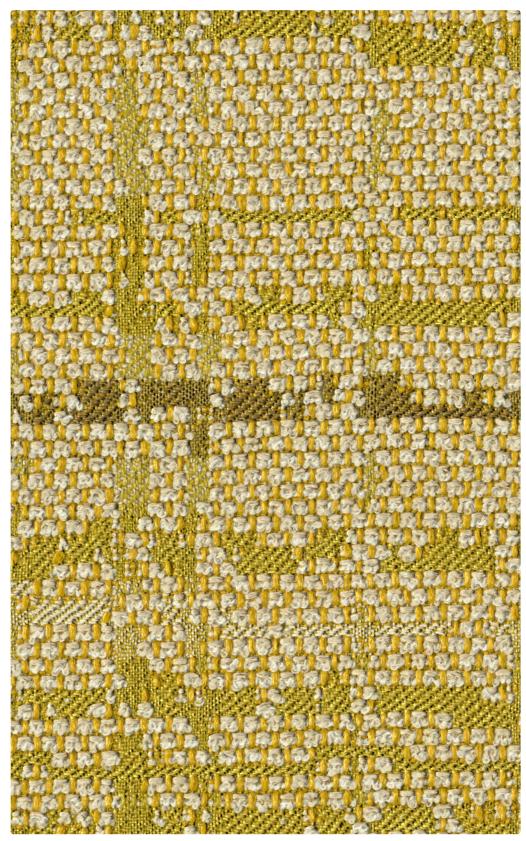

Dappled Sunlight 4107-05

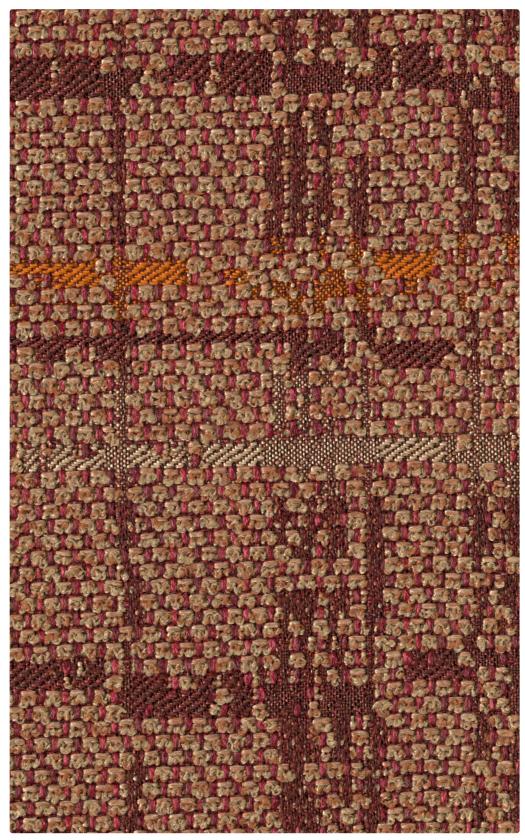


Painted Desert 4107-06

## Geoglyph

Name

Style No.	4107
Designer	Suzanne Tick
Specification	Use: Indoor/Outdoor Upholstery Content: 98% Polypropylene + 2% Polyester Weight: 28.22 oz per linear yard Width: 55" Pattern Repeat: Horizontal 27.56", Vertical 39.37", Random Match Directional: Yes
Finish	None
Performance	Abrasion: ASTM D4157 Wyzenbeek 45,000 double rubs Breaking Strength: ISO 13934-1 Warp 652 lbf, Fill 472 lbf Seam Slippage: ISO 13936-1 Warp >45 lbf, Fill >45 lbf Colorfastness to Light: ISO 105-B02 Grade 7-8 at 1500 Hours Colorfastness to Crocking: ISO 105-X12, Wet Class 4, Dry Class 4-5 Pilling: ISO 12945-2 (Martindale), Class 4-5
Flame Retardancy	Cal TB 117-2013
Maintenance	W, Clean with a water-based cleaning agent. Do not use solvent products. Bleach Cleanable: 9% (10:1 Ratio), wipe with water after solution
Environmental	Chemical Finish Free Heavy Metal Free Oeko-Tex 100 Certified REACH Regulation Compliant
Origin	Italy Dye lots may vary slightly from samples shown. Samples shown off the bolt.





Graphic shows one full repeat.

**Canada** 877.705.LUUM luumtextiles.ca **USA** 877.705.LUUM luumtextiles.com International 919.464.2922 luumtextiles.com

cdn/us/int/01-23

© Luum<sup>™</sup> 2023, all rights reserved. \*.™ Trademarks used under license by Luum™, Geoglyph™ \*Certification Marks owned by the Association for Contract Textiles, Inc.

U8-SC-305-4107